



CNC TURRET PUNCH PRESSES

STRIPPIT P-SERIES




Efficient & Productive

LVD Strippit's P-Series CNC turret punch presses offer a high level of efficiency and productivity in an economical design. Based on LVD Strippit's renowned punch press technology, Strippit P-Series machines feature an advanced control, rugged frame and a proven hydraulic ram system to achieve high reliability and high throughput.

Strippit P-Series 20-ton punch presses deliver up to 300 HPM at a 1" (25 mm) feedrate and up to 650 HPM at a 0.04" (1 mm) feedrate. These machines handle a range of material sizes and thicknesses, and accommodate a nominal workpiece size of up to 60" x 98.4" (1524 x 2500 mm), depending on model. Larger workpieces are handled with clamp repositioning. The Smart Clamp feature automatically determines exact clamp positions to provide the smallest possible no-punch zones.

A 21-station thick-style turret is engineered for high performance, reliability and ease of use. Three 2" (50,8 mm) auto index stations are standard. These stations can accept up to 2" (50,8 mm) diameter tools, as well as today's most advanced tooling innovations, providing optimal flexibility. Tool changeover is simplified with quick and easy access to multiple turret stations from a large tool-load door.





Strippit P-Series punch presses feature a single-piece stress-relieved frame and advanced table positioning system to achieve accuracy of $\pm .004''$ (0,10 mm) with a repeatability of $\pm .002''$ (0,05 mm) over the entire table. The rigid frame and precise tool guiding system ensure punch and die alignment to provide long tool life and consistently high quality parts.

Strippit P-Series punch presses employ the powerful Fanuc CNC control with self-prompting color displays that simplify use while maximizing efficiency. The Strippit P-Series – punch press equipment engineered to deliver performance with economy.




Strippit P-1212

Accurate & Reliable



Smart Clamp minimizes no-punch zones to reduce progressive move requirements and improve material utilization.

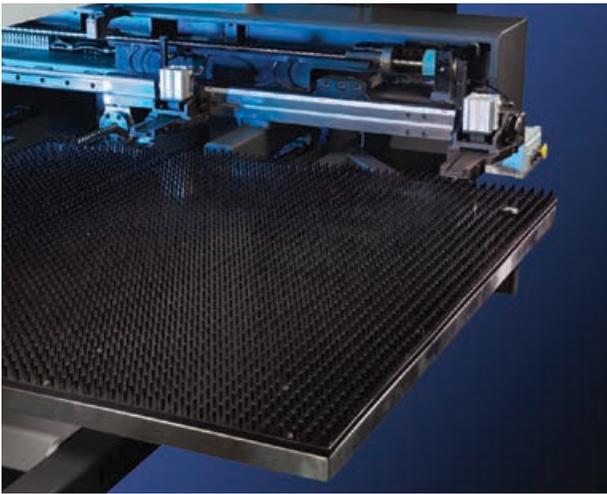


The unique design of the brush table reduces noise and part scratching.

Hydraulic ram technology offers complete control of ram position, allowing Strippit P-Series punch presses to achieve the highest punching rates in their class. Parameters are easily accessed and changed to provide optimal forming characteristics and to reduce slug pulling.

The advanced hydraulic drive system reduces noise and shock to increase machine longevity and reduce tool wear.

Strippit P-Series punch presses feature a direct drive axes configuration that provides the industry's tightest tolerances. This design better controls both part tolerance and repeatability to eliminate backlash and wear for long-term accuracy and reliability. Strippit P-Series machines provide accuracy of $\pm .004''$ (0,10 mm) with a repeatability of $\pm .002''$ (0,05 mm) over the entire table.

- Rigid table guiding design ensures smooth, fast and accurate positioning of the piece part.
- Patented sheet repositioning system handles larger sheets and special part configurations.
- Smart Clamp feature automatically determines exact clamp locations to provide the smallest possible no-punch zone.
- Distance between work clamps can be maximized for excellent stability while punching large sheets.

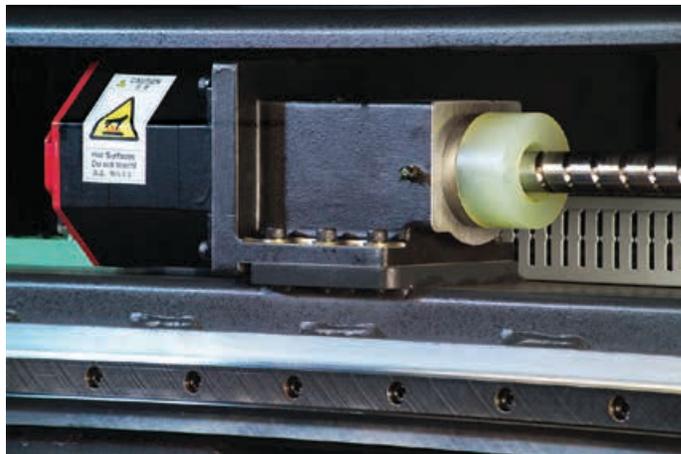

Direct drive servomotors eliminate backlash for extremely accurate part positioning.

Capacity & Flexibility

Strippit P-Series punch presses are equipped with a 21-station thick-style turret engineered for capacity and flexibility. This versatile turret design allows every station to accept shaped or round punches and dies, reducing set-up time.

The turret is gear-driven from the outer diameter for smooth, precise motion. Shot pin assemblies are also mounted beyond the punch and die locations to optimize alignment at the tool during the punch cycle.

- Large tool door allows easy access to the turret for quick tool loading. Quick-change die holders further reduce turret set-up time.



Quick-change die holders reduce set-up time to increase overall productivity.

- Ability to punch at any location on the sheet using any turret station within the nominal sheet size reduces repositioning and maximizes productivity.
- Generous distance between upper and lower turret facilitates high forming operations.
- Joystick mounted near the tool load door provides easy, convenient rotation of the turret for tool changing.


Three Standard Auto-Index Stations

Strippit P-Series punch presses feature three 2" (50,8 mm) "C" size auto-index stations as standard. These programmable stations allow shapes to be punched at any angle. Each station accepts tools up to 2" (50,8 mm) in diameter, including wheel-style or scribing tools.


Superior Precision

Strippit P-Series turrets feature hardened steel guide bushings for accurate punch and die alignment and are keyed to accept shapes in every station. Bushings can be quickly and easily replaced, eliminating the need for costly remachining of the turret.

- Hardened outboard shot pins provide precise alignment of punch and die for exceptional hole quality.
- Gear-driven turret design ensures fast, precise indexing.
- Bi-directional turret rotation automatically selects the shortest possible route to the next punching station for fast station-to-station positioning.

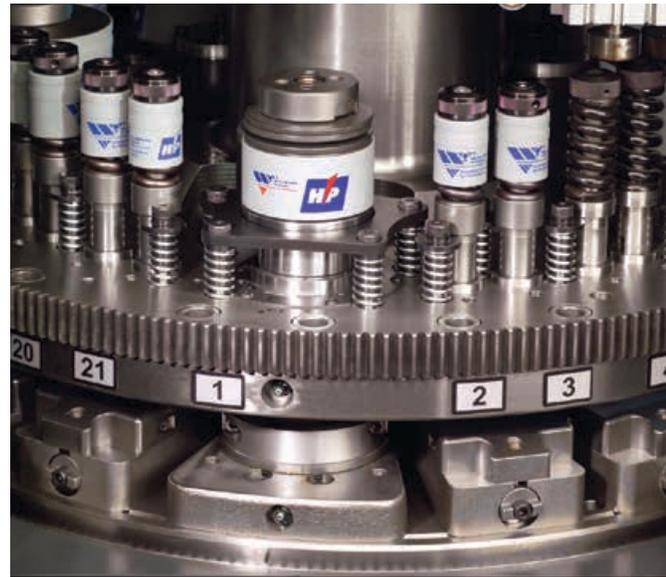

A 21-station turret configuration offers tremendous flexibility and capacity.

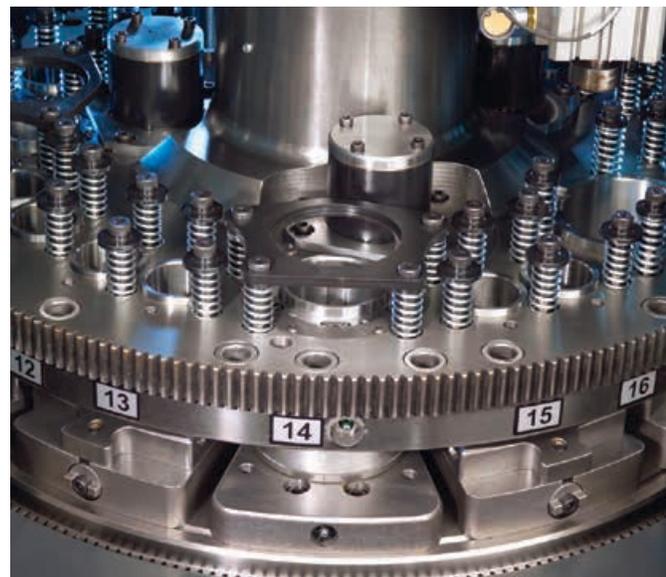

Hardened steel bushings provide effective tool guiding over an extended period of time and can be easily replaced if worn.


Powerful CNC Control

Strippit P-Series punch presses feature a Fanuc CNC control. This powerful control provides Fanuc's renowned reliability in control and servo technology yet offers simplicity for operator input of critical dimensions. The control allows the machine operator to edit, input or output programs during machine operation to reduce set-up and improve productivity.

- Random and repeat patterns simplify programming, reduce program length.
- Tool hit record tracks hits for each punch in the turret.
- PCM card slot, RS232 or network interface allows simple updating of software revisions and easy backup of parameters and part programs.
- CADMAN offline programming system:
 - Automated 3D folding/unfolding
 - Automatic tool selection and turret configuration
 - Full support for all standard and advanced punching functions, including auto-index stations, standard and special punching, forming
 - Automatic nesting




The Fanuc CNC control is powerful yet easy to use with self-prompting color displays.

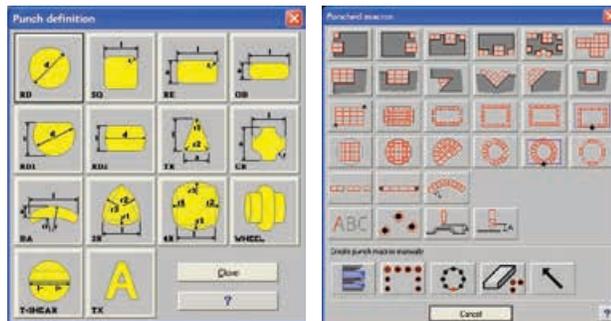

Parametric Tools

Punch Macros

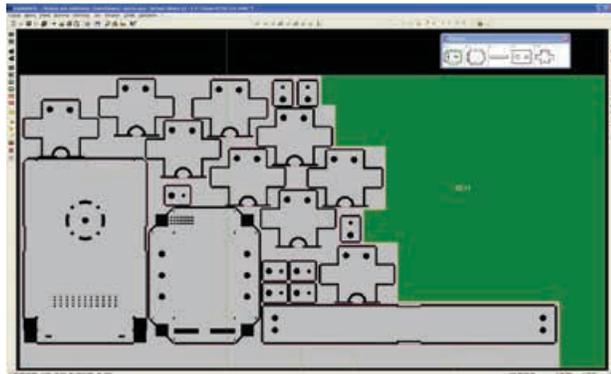

Nesting

S P E C I F I C A T I O N S

	Strippit P-1212	Strippit P-1225	Strippit P-1525
Max. Punching Capacity	20 metric ton	20 metric ton	20 metric ton
Max. Material Thickness	0.250" (6,35 mm) ¹	0.250" (6,35 mm) ¹	0.250" (6,35 mm) ¹
Punching Accuracy	± 0.004" (0,1 mm)	± 0.004" (0,1 mm)	± 0.004" (0,1 mm)
Nominal Workpiece Size ² (Y,X)	49.21" x 49.21" (1250 x 1250 mm)	49.21" x 98.4" (1250 x 2500 mm)	60" x 98.4" (1524 x 2500 mm)
Table Type Capacities			
Brush table	Up to 160 lbs. (73 kg) ³	Up to 160 lbs. (73 kg) ³	Up to 174 lbs. (79 kg) ³
Brush table with roller balls (optional)	n/a	Up to 160 lbs. (73 kg) ³	Up to 174 lbs. (79 kg) ³
Floating Clamps	2 manual lock	2 manual lock (3rd optional)	2 manual lock (3rd optional)
Maximum Clamp Spread	37.4" (950 mm)	74.80" (1900 mm)	74.80" (1900 mm)
Feed Clearance	0.984" (25 mm)	0.984" (25 mm)	0.984" (25 mm)
Turret Configuration	21 stations	21 stations	21 stations
Turret Layout	8 'A' - 0.5" (12,7 mm) 8 'B' - 1.25" (31,7 mm) 3 'C' - 2.0" (50,8 mm)* 2 'D' - 3.5" (88,9 mm)	8 'A' - 0.5" (12,7 mm) 8 'B' - 1.25" (31,7 mm) 3 'C' - 2.0" (50,8 mm)* 2 'D' - 3.5" (88,9 mm)	8 'A' - 0.5" (12,7 mm) 8 'B' - 1.25" (31,7 mm) 3 'C' - 2.0" (50,8 mm)* 2 'D' - 3.5" (88,9 mm)
*Auto-Index Stations	3 'C' - 2.0" (50,8 mm)	3 'C' - 2.0" (50,8 mm)	3 'C' - 2.0" (50,8 mm)
Angular Positioning Accuracy	± 0,05 degrees	± 0,05 degrees	± 0,05 degrees
Axis Traverse Speed	Up to 3149 IPM (80 m/min.) combined	Up to 3385 IPM (86 m/min.) combined	Up to 3228 IPM (82 m/min.) combined
Maximum Hit Rate at 2 mm working stroke⁴			
0.04" (1 mm) Feedrate	Up to 650 HPM	Up to 600 HPM	Up to 600 HPM
1" (25 mm) Feedrate	Up to 300 HPM	Up to 270 HPM	Up to 270 HPM

Specifications subject to change without notice

Notes

- 1 - within maximum material weight capacity
- 2 - longer workpiece sizes handled with clamp reposition
- 3 - at a reduced speed
- 4 - material thickness + tip recess + die penetration

Turret Configuration



■ Indicates Auto-Index Station

All turret stations are keyed to accept shapes and punch at Y=0



A D D R E S S E S

HEADQUARTERS

Strippit Inc.

12975 Clarence Center Rd.
USA-AKRON NY 14001
UNITED STATES
Tel. + 1 716 5424511
Fax + 1 716 5425957
e-mail: marketing@strippit.com

LVD Company n.v.

Nijverheidslaan 2
B-8560 GULLEGEM
BELGIUM
Tel.+ 32 56 43 05 11
Fax + 32 56 43 25 00
e-mail: marketing@lvd.be

JOINT VENTURES

LVD-HD

Huangshi City,
Hubei Province, China

SUBSIDIARIES*

LVD BeNeLux nv

Gullegem, Belgium

LVD do Brasil Ltda.

Joinville, Brazil

LVD GmbH

Lahr, Germany

LVD Italia s.r.l.

Parma, Italy

LVD Korea

Inchon City, Korea

LVD Malaysia Sdn Bhd

Shah Alam, Malaysia

LVD Polska Sp. z.o.o.

Kedzierzyn-Kozle, Poland

LVD Pullmax Limited

Oxfordshire, United Kingdom

LVD S2/S3

Tornala, Slovakia

LVD s.a.

Raismes, France

LVD-Strippit Shanghai Co., Ltd.

Shanghai, China

LVD Thailand Limited

Bangkok, Thailand

Magal LVD India Pvt. Ltd

Bangalore, India

P.T. LVD Center

Jakarta, Indonesia

**For full address details of your local subsidiary or agent, or to download the latest literature, please visit our website:*

www.lvdgroup.com