

PRODUCT RANGE




CONNECT WITH US ON SOCIAL MEDIA


FACEBOOK




INSTAGRAM



LINKEDIN



YOUTUBE



LVD PRODUCT RANGE

**SHEET METALWORKING,
OUR PASSION,
YOUR SOLUTION**

LVDGROUP.COM

LASER


LaserTWO



Cost-efficient laser cutting

- optional local or full covers, shuttle bed
- 3, 6 or 12 kW laser source
- sheet size format: 3050 x 1525 mm
- optional Load-Assist automation (load only)

Puma

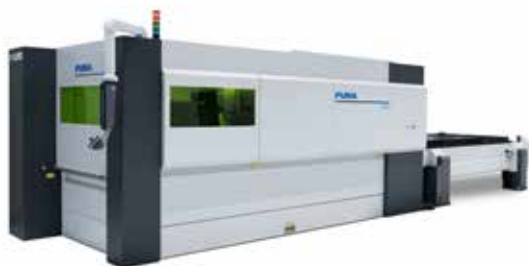

Total laser cutting solution

- processes a wide range of material types and thicknesses
- automation-ready
- 3, 6, 12 or 20 kW laser source
- sheet size formats: 3050 x 1525 mm, 4065 x 2035 mm, 6160 x 2035 mm
- Puma 6525: 6400 x 2500 mm (straight cutting) - 6100 x 2000 mm (bevel cutting, bevel head optional)

Phoenix FL



Dynamic fiber laser cutting system is the perfect all-round performer

- processes a wide range of ferrous and non-ferrous materials
- high wall-plug efficiency of laser source up to 40 %
- 6, 12 or 20 kW laser source
- sheet size formats: 3050 x 1525 mm, 4065 x 2035 mm, 6160 x 2035 mm
- Phoenix FL-6525: 6400 x 2500 mm (straight cutting) - 6100 x 2000 mm (bevel cutting, bevel head optional)

Taurus



Large-format fiber laser cutting machine

- sheet width: 3200 mm
- 12, 20 or 30 kW laser source
- maximum cutting length (multiple sheets)
straight cutting: 41,900 mm/bevel cutting: 41,500 mm
- available with bevel head

Tube lasers



High-performance tube laser cutting machines

- front loader standard
- up to 6 kW
- up to 250 mm square or round
- models/tube length:
TL 8525/8200 mm (with bevel head),
TL 2665/7925 mm

PUNCH

Strippit P



Cost-effective punch press suitable for cellular manufacturing and short production runs

- flexible 33-station turret
- maximum hit rate: 300 hits/min on 25.4 mm and 650 hits/min on 1 mm centers
- punching force: 20 ton; max. material thickness: 6.35 mm
- sheet size formats: 1250 x 1250 mm, 1250 x 2500 mm, 1525 x 2500 mm

Strippit M



Large capacity and high-performance punch press, ideal for batch processing

- large turret capacity: 47 stations
- maximum hit rate: 400 hits/min on 25.4 mm and 900 hits/min on 1 mm centers
- punching force: 20 ton; max. material thickness: 6.35 mm
- sheet size formats: 1250 x 1250 mm, 1250 x 2500 mm, 1525 x 3050 mm

Strippit V



Punch press suitable for high tonnage and high production punching needs

- large turret capacity: 48 stations
- maximum hit rate: 440 hits/min on 25.4 mm and 900 hits/min on 1 mm centers
- punching force: 30 ton; max. material thickness: 6.35 mm
- sheet size formats: 1250 x 2500 mm, 1525 x 3050 mm, 1525 x 5000 mm

Strippit VX



Highly flexible punching machine, expandable with indexable multitools

- large turret capacity: 48 stations
- maximum hit rate: 530 hits/min on 25.4 mm and 920 hits/min on 1 mm centers
- punching force: 20 ton; max. material thickness: 6.35 mm
- sheet size formats: 1250 x 2500 mm, 1525 x 3050 mm

Strippit PX



Single-head punch press that can punch, bend, tap and form all on a single machine

- 20 indexable tool stations, T-style compatible
- maximum hit rate: 505 hits/min on 25.4 mm and 910 hits/min on 1 mm centers
- punching force: 20 ton; max. material thickness: 6.35 mm
- sheet size formats: 1250 x 2500 mm, 1525 x 3050 mm, 1525 x 5000 mm

Strippit PL - Punch Laser Combination



Punching advantages combined with the speed of fiber laser cutting

- available in both turret and single-head technology
- punching force: 30 ton (turret), 20 ton (single-head)
- 4 kW laser source
- sheet size formats: 1525 x 3050 mm, 1525 x 5080 mm
- cost-effective QX-L model: single-head design with fixed cutting head

ETM - Extended Tool Magazine



Increased tooling capacity and automatic tool change

- 40 additional punch/die combinations
- preload tools during operation
- tool life monitoring
- available for Strippit PX

PA and LA automation



LA Load

Simple and efficient punch and laser automation

- PA - Push Autoload (punch): loading/unloading (1215, 1225, 1530, 1540)
- LA Load (laser): loading to the shuttle table
- LA Load/Unload (laser): loading and unloading to a station or conveyor
- LA 3015: sheet size up to 3070 x 1540 mm, weight 900 kg

CT - Compact Tower



CT-L

Cost-effective tower automation for punch (CT-P) and laser (CT-L)

- loading, unloading and material/parts storage
- 4, 6, 8 or 10 pallets
- CT-P & -L 3015: sheet size up to 3050 x 1525, pallet capacity: 3000 kg

FA - Flexible Automation



FA-P

Advanced automation system for punch (FA-P) and laser (FA-L)

- high-speed loading and unloading
- part picking and stacking on Strippit PX punch press
- FA-P & -L 3015: sheet size up to 3050 x 1525 mm, pallet capacity: 3000 kg
- FA-L 4020 & 6020: sheet width: 2055 mm, sheet lengths: 4095 and 6135, pallet capacity: 5000 kg

TAS/WAS - Tower and Warehouse Automation Systems



WAS

Automation Systems for punch and laser


- TAS: single or double-tower storage systems
- TAS sheet size formats: 3070 x 1540 mm, 4090 x 2055 mm, weight 3000 kg
- WAS: customisable storage, minimum of 4 towers in single or double rows
- WAS 3015: sheet size up to 3070 x 1540 mm, weight 3000 kg
- WAS 4020: sheet size up to 4090 x 2055 mm, weight 5000 kg



**Products
materialised by
LVD touch your
life in more ways
than you can
imagine.**



BEND

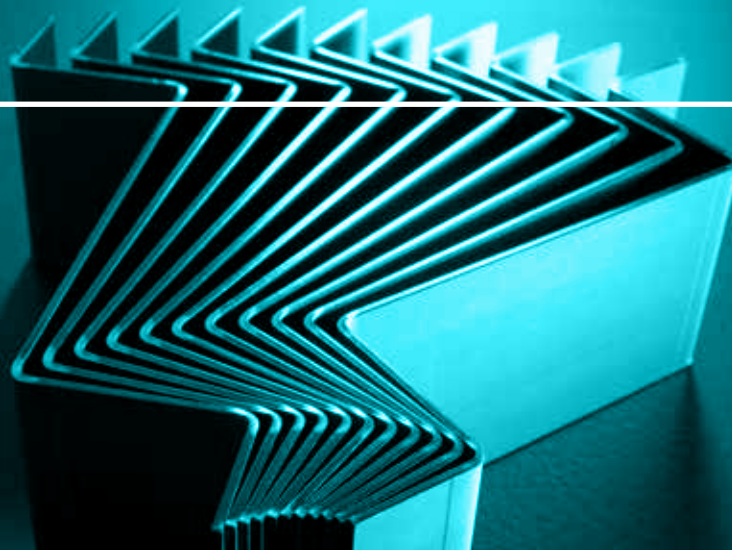

Dyna-Press



Electric-drive press brake efficiently bends small parts at high speeds

- 4-axis back gauge, Dyna-Press Pro 5-axis back gauge
- bending speeds up to 25 mm per second
- bending capacities: 24 to 60 ton
- bending lengths: 1250 to 2040 mm
- Dyna-Press Pro available with Easy-Form® Laser

PPED



Practical and easy-to-use hydraulic press brake for general bending applications

- 2- or 4-axis back gauge
- CNC crowning available
- bending capacities: 50 to 320 ton
- bending lengths: 2000 to 4000 mm

PPEB/Easy-Form®



High-precision hydraulic press brakes for demanding applications

- 2-, 5- or 6-axis backgauge
- turbo hydraulics for high speed bending
- Easy-Form® Laser adaptive bending system (Easy-Form series)
- CNC crowning available
- bending capacities: 80 to 640 ton
- bending lengths: 1500 to 8000 mm

ToolCell



Full-featured hydraulic press brake with integrated automatic tool changing

- Easy-Form® Laser adaptive bending system
- bending capacities: 135 to 220 ton
- bending lengths: 3060 to 4080 mm
- ToolCell Plus: fit for higher tonnages per meter

Tandem press brake



Tandem press brakes of similar or dissimilar tonnage for extra-long bending lengths

- tandem configuration
- synchronised operation of machines via single CNC control
- independent operation of each machine with separate control
- custom configurations for Easy-Form and PPEB-H

PPEB-H



Configure-to-order press brake for L, XL and XXL special applications

- numerous configurable machine selections and automation options, e.g. Easy-Form® Laser
- CNC crowning
- turbo hydraulics for high speed bending
- 400 ton x 4000 mm bending length to 3000 ton x 14000 mm

Synchro-Form



Award-winning adaptive bending technology for XXL profiles and components

- efficient bending of XXL profiles and components
- automatic part positioning and manipulation
- angle measurement and compensation avoid accumulated error
- 400 ton x 4000 mm bending length to 3000 ton x 14000 mm

Robotic Bending System - RBS 80



Fully autonomous bending cell

- configurable, automated bending cell
- parts up to 3050 x 1250 mm, part weight up to 80 kg
- maximum profile length: 3000 mm
- bending capacities: 135 or 220 ton
- bending lengths: 3000, 4000 or 4200 mm
- press brakes: PPEB, Easy-Form and ToolCell
- automated programming, no robot teaching required

Robotic Bending System - RBS 40



Flexible bending cell

- configurable, automated bending cell
- parts up to 1600 x 1200 mm, part weight up to 40 kg
- maximum profile length: 2000 mm
- bending capacities: 80, 135 or 220 ton
- bending lengths: 2500 or 3000 mm
- press brakes: PPED, PPEB, Easy-Form and ToolCell
- automated programming, no robot teaching required

Robotic Bending System - RBS 4



Cost-efficient bending cell

- configurable, automated bending cell
- parts up to 600 x 400 mm, part weight up to 4 kg
- maximum profile length: 600 mm
- bending capacities: 40 or 50 ton
- bending lengths: 1500 or 2000 mm
- press brakes: PPED and Dyna-Press Pro
- automated programming, no robot teaching required

Ricobb



Retrofittable cobot bending system

- parts up to 300 x 200 mm
- part weight up to 4 kg
- available for LVD press brakes built from 2001
- interchangeable gripper extensions
- easy programming, simple cobot teaching

Multifold panel bender



Cost-effective panel production

- handling large-scale panels
- full automation for high productivity
- one set of tools for a variety of profiles
- up to 2500 mm bending length, 400 mm height (Multifold 2540)
- up to 3200 mm bending length, 110 mm height (Multifold 3211)

Press brake tooling



High-precision press brake tooling for standard and custom applications

- progressive STONE radius on V-dies
- induction hardened up to a minimum of 56 HRC
- standard and ToolCell-specific punches and dies, multi-V and adjustable dies; hemming tools
- dies in Thyrotherm® for heavy-duty bending

CS shear



Reliable and cost-competitive shearing equipment

- motorised adjustment of cutting angle
- blades with four cutting edges
- standard blade suitable for mild and stainless steel
- sheet thickness/cutting length: 6.35 mm/3100 mm, 6.35 mm/4000 mm, 13 mm/3100 mm

MVS & HGS shears



Highly flexible shearing machines

- motorised adjustment of blade clearance and cutting angle
- blades with four cutting edges
- configurable features
- sheet thickness/cutting length: 6.35 mm/3100 mm to 30 mm/6200 mm

INTEGRATE



CADMAN-FLOW



Connects all CADMAN® software modules, improving process flow

- single point of entry to the complete software suite
- API for importing parts and production orders
- automates your part programming workflow
- provides real-time machine status
- intuitively browse parts and their bend solutions

CADMAN-SDI



Smart Drawing Importer

- imports native CAD-files per part, per batch or in watch mode in over 40 file types
- visualises all cost drivers ready for export
- repairs parts with BricsCAD®
- checks feasibility and estimates time for laser cutting, punching and bending
- connects to ERP with XML communication

CADMAN-B



Achieves the correct unfolding first time and easily creates complex bending programs

- determines the optimal bend sequence, tool and backgauge setup
- optimises tool setup across different parts: part sequence, tooling type and setup
- seamlessly links to CADMAN-L or P for the creation of a nesting and laser cutting or punching programs
- calculates bending solutions per part, per batch or in watch mode

CADMAN-SIM



Smart programming software for robotised bending cells

- automatically programs press brake, robot and gripper
- calculates bending solution, collision-free robot path and part handling
- simulates the complete part production
- no in-depth robot knowledge or robot teaching required

CADMAN-P/L



Uses the full potential of laser cutting and punching machines

- enables file importation through simple drag and drop
- simulates laser cutting (L) and punching process (P)
- smart features: optimised sheet utilisation, fly-cut, remnant creation, collision avoidance (L)
- tool expert defines punching and forming functions (P)
- includes report module for time and cost calculation

CADMAN-JOB



Examines, filters and bundles production orders for a minimised setup

- connects the central database, ERP system, CAM and workshop
- generates, classifies and groups jobs for all sheet metal fabrication operations
- provides all relevant production information for reverse calculations
- visualises foreign operations such as tapping and deburring

Touch-i4



Powerful tablet collects real-time information and helps the operator sort and validate parts

- KPI (Key Performance Indicators) history indication
- future workload overview per work center
- Sort & Validate mode, location assignment according to production order
- option to CADMAN-JOB

LVDGROUP.COM